


# RADIAL TYPE

# NC Series

Non Polarity, For Twinkling Light of Automobile



- Suitable for the direction light of automobile and motorcycle.




## ● SPECIFICATION

Item	Characteristic
Operation Temperature Range	-40 ~ +85°C
Rated Working Voltage	13VDC
Capacitance Tolerance (120Hz 20°C)	±10%(K) ±20%(M) +20% -10%(V)
Leakage Current (20°C)	$I \leq 1000 (\mu A)$ Under 100Ω resistor series and rated voltage applied whichever after 3 minutes. I : Leakage Current (μA)    C : Rated Capacitance( μF)    V : Working Voltage (V)
Dissipation Factor (tan δ) (120Hz 20°C)	$\tan \delta \leq 0.50$

## ● DIMENSIONS (mm)

φD	10	12.5
F	5.0	5.0
d	0.6	0.6
α	1.5	1.5

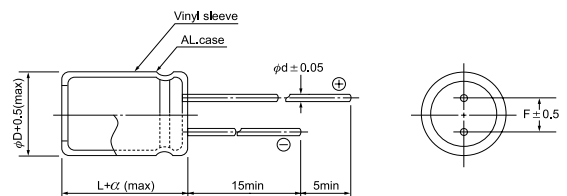

## ● CASE SIZE & MAX RIPPLE CURRENT

Case size: D x L (mm)

μF	V(Code)		13 (1P)
	Code	Item	DxL
1500	152		10x25
1700	172		12.5x20
2200	222		12.5x25