

RADIAL TYPE


NT

Series

5mmL 85°C, Non Polarity

JAMICON®

- Non polarity series with 5mm height




SPECIFICATION

Item	Characteristic						
Operation Temperature Range	-40 ~ +85°C						
Rated Working Voltage	6.3 ~ 50VDC						
Capacitance Tolerance (120Hz 20°C)	±20%(M)						
Leakage Current (20°C)	$I \leq 0.05CV$ or $10 (\mu A)$					I : Leakage Current (μA)	
	*Whichever is greater after 2 minutes					C : Rated Capacitance (μF)	
Surge Voltage (20°C)	W.V.		6.3	10	16	25	35
	S.V.		8	13	20	32	44
Dissipation Factor (tan δ) (120Hz 20°C)	W.V.		6.3	10	16	25	35
	tan δ		0.24	0.20	0.17	0.17	0.15
Impedance ratio at 120Hz							
Low Temperature Stability	Rated Voltage (V)			6.3	10	16	25
	-25°C / +20°C			4	3	2	2
	-40°C / +20°C			10	8	6	3
After 1000 hours application of W.V. and +85°C ripple current value, the capacitor shall meet the following limits. (DC + ripple peak voltage \leq rate working voltage) (The polarity need to exchange every 250 hours)							
Load Life	Capacitance Change		$\leq \pm 20\%$ of initial value				
	Dissipation Factor		$\leq 200\%$ of initial specified value				
	Leakage current		\leq initial specified value				
Shelf Life	At +85°C no voltage application after 500 hours the capacitor shall meet the limits for load life characteristics. (with voltage treatment)						

DIMENSIONS (mm)

ϕD	4	5	6.3
F	1.5	2.0	2.5
d	0.45	0.45	0.45
α	1.0	1.0	1.0

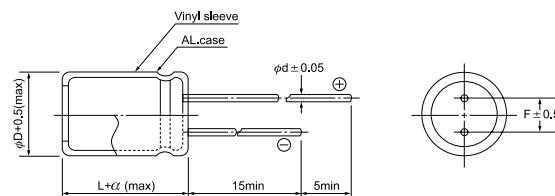

CASE SIZE & MAX RIPPLE CURRENT

μF	V(Code)	Case size : D x L (mm)				Max ripple current : mA(rms)				85°C 120Hz	
		Code	Item	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.
0.1	0R1									→	4x5
0.22	R22									→	4x5
0.33	R33									→	4x5
0.47	R47									→	4x5
1.0	010									→	4x5
2.2	2R2							→	4x5	8.4	5x5
3.3	3R3					→	5x5	12	5x5	16	5x5
4.7	4R7				→	4x5	12	5x5	16	5x5	18
10	100	4x5	14	4x5	17	5x5	23	6.3x5	27	6.3x5	29
22	220	5x5	28	6.3x5	33	6.3x5	37				
33	330	6.3x5	37	6.3x5	41	6.3x5	49				
47	470	6.3x5	45								

All blank voltage on sleeve marking is the same voltage as " → " point to.